

- HIGH PERFORMANCE AT AN ECONOMICAL PRICE
- SEPARATE INTRUDER AND FIRE MESSAGES
- ENGLISH, SPANISH OR BI-LINGUAL OPTIONS
- LOW CURRENT DRAW WITH HIGH SOUND OUTPUT
- COMPATIBLE WITH A WIDE RANGE OF CONTROL PANELS
- BOTH CHANNELS ACCEPT POSITIVE OR NEGATIVE INPUT TRIGGERS

The SD-301a is a voice siren driver, which combines ease of use with high performance in a variety of applications. Two voice messages are provided:


Intrusion Message:

"You have violated a security system. The authorities have been notified." The message is preceded by a yelp siren sound.

Fire Alarm Message:

"The fire alarm has been activated. Please leave immediately." The message is preceded by a pulsed horn.

Spanish versions of both messages are available and the SD-301a can be programmed for English only, Spanish only and bilingual operation.

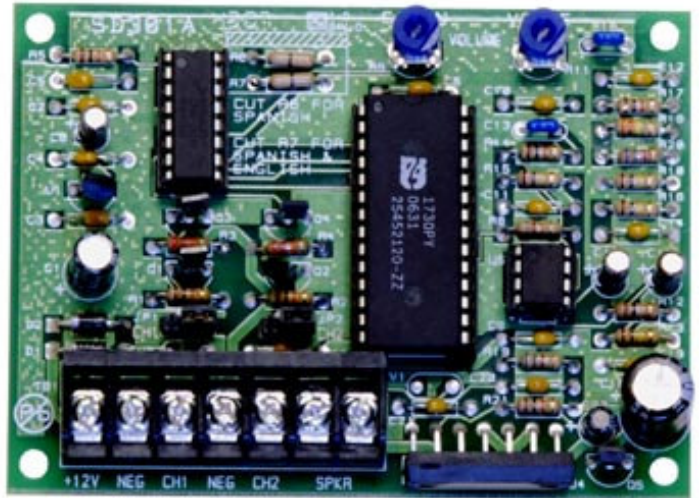

The volume of the yelp / horn and the voice message are separately adjustable.

The SD-301a is activated by either a positive or a negative trigger signal. It can also distinguish between a steady trigger signal for an intruder alarm and a pulsed signal for fire.

SPECIFICATIONS

Operating voltage: 12V DC (9-14V DC)

Current Draw: <10mA standby; 1.03 Amps when activated at maximum volume.

Sound Output: 115dB at 6 feet

Dimensions: 2⁷/₈ x 3³/₄ x 7¹/₈ inches

Languages: English, Spanish